

6

5

4

3

2


1

**MATERIAL:**




Housing & Cord Clamp: Nylon, color black  
Contact Holder & Terminal Retainer: Polycarbonate  
Contacts: Brass

**ELECTRICAL SPECIFICATIONS:**

Rated current: 20A  
Rated voltage: 125/ 250 VAC

APPROVALS:  **UL** US  
LISTED

**RoHS  
COMPLIANT**

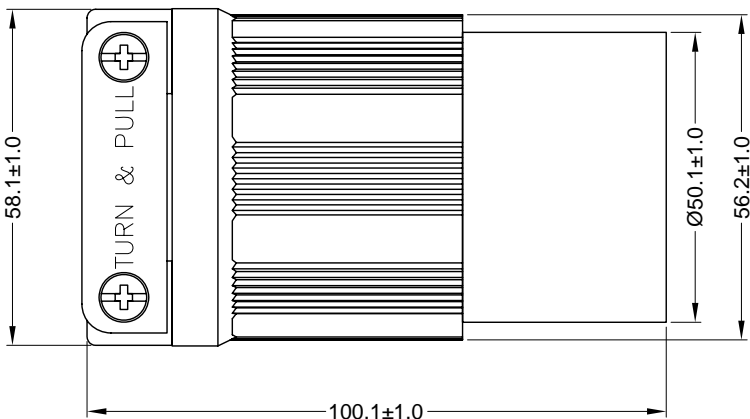

|     |      |        |      |       |      |
|-----|------|--------|------|-------|------|
| REV | DATE | CHANGE | CHKG | CHECK | APPR |
|     |      |        |      |       |      |

**REVISIONS**

|   |        |       |        |
|---|--------|-------|--------|
| TOLERANCE<br>UNLESS OTHERWISE SPECIFIED |        |       |        |
| X                                       | ± 1    |       |        |
| X.X                                     | ± 0.4  |       |        |
| X.XX                                    | ± 0.13 |       |        |
| DRAWN BY                                | PB     | DATE: | 5/7/10 |
| CHECK BY                                |        | DATE: |        |
| APPR BY                                 |        | DATE: |        |

|  |  |
|--|--|
| <b>Power Dynamics, Inc.</b>  |  |
| Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076         |  |
| PART: NEMA L14-20R CORD CONNECTOR<br>20A 125/250VAC; ASSEMBLY TYPE |  |
| PART #: <b>PD-L1420C-B</b>   |  |
| SIZE: A  | ALL DIMENSIONS FOR REFERENCE ONLY<br>DIMENSIONS ARE IN MILLIMETERS |
| SCALE: NTS   |  |
| SHEET 1 of 1   | REV:   |

6

5

4

3

2

1