


# PERIMETER SERIES

7

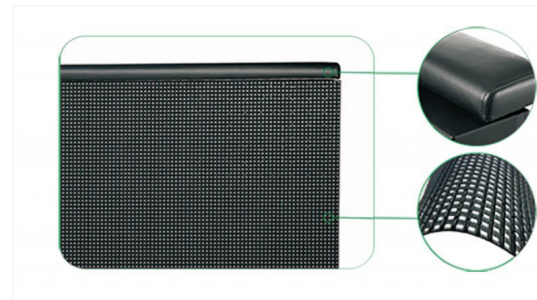

## Benefits

- Cushioned top and plastic mask helps to protect players against injury, and the panel against damage
- Flexible supporting angles ranging from 65° - 90° to accommodate the best views around the stadium
- High refresh rates offering outstanding image and video quality

## Specifications

Model	P8	P10	P16
Pixel Pitch	8mm	10mm	16mm
LED Configuration	SMD3IN1	SMD3IN1	1R1G1B
Module Resolution	32 × 16	32 × 16	16 × 16
Module Size	320 × 320mm	320 × 320mm	320 × 320mm
Pixel Intensity	15625	10000	3906
Gray Scale	16384 level	16384 level	16384 level
Brightness	7000 nit	6500 nit	6500 nit
Scan Way	1/4	1/2	Static Scan
Viewing Angle	120/120	120/120	120/120
Weight	45kg	45kg	45kg
IP Rating	IP65	IP65	IP65
Max Power Consumption	900W/m <sup>2</sup>	900W/m <sup>2</sup>	900W/m <sup>2</sup>
Working Voltage	110V - 240V	110V - 240V	110V - 240V
Life Span	> 100000 hours	> 100000 hours	> 100000 hours
Temperature Range	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C

Recommended Applications

Stadium Advertising